



Model 33-3B
33 cm, 50 dB, 50/20/6 Watt
RF LINEAR
POWER AMPLIFIER




The KH6HTV-VIDEO Model 33-3B, RF Power Amplifier is for use in the amateur radio 33cm band (902-928 MHz). It is a Class A-B amplifier designed for linear service. It can be used to produce a 50 Watt FM signal or 20 Watt (pep), analog, TV signal. It can also produce a 6 Watt (rms), high-definition (1080P), digital TV signal. The rf power output can be lowered -5 dB or -10 dB for reduced DC current draw with the front panel rotary switch. Provision is included for external PTT control. It is ideal for use as the final amplifier in a digital ATV repeater.


KH6HTV-VIDEO Boulder, Colorado, USA
 web site = www.kh6htv.com email = kh6htv@arri.net 303-594-2547

PARAMETER	Typical Performance	Notes
Output Power (analog TV) (VUSB-TV, NTSC)	20 Watts PEP (+43 dBm) also 8 Watt or 2.5 Watt	peak power on sync tips adjustable in -5dB steps
Output Power (Digital TV)	6 Watts (+38dBm) also 2 or 0.6 Watts	rms, avg. power,DVB-T service adjustable in -5 dB steps
Output Power (FM, CW)	50 Watts, typical	saturated ouput
Output Power (-1dB)	40 Watts (+46dBm)	-1dB gain compression
Output Power vs. Supply Voltage	+43 dBm @ 12 - 13.8 Vdc +42 dBm @ 10 Vdc	analog VUSB-TV
RF Power Amplifier Gain	50 dB, nominal	
Amplifier Gain Flatness	± 2 dB	902 - 928 MHz
Amplifier Max Input Power	50 mW, +17 dBm	
LSB Rejection (analog VUSB)	better than -20dB	LSB/USB ratio - see photo
Spectrum Regrowth (Digital TV)	-30 dB at +38dBm avg	shoulder break-point, see photo
Duty Cycle	100 %	heat sink & cooling fan included
DC Supply Voltage	13.8 Vdc	10 to 15 Vdc
DC Current @ 13.8 Vdc	10, 3 or 2 Amps	6 W / 2 W / 0.6W (DTV)
Control - Rotary Switch	OFF - HI - MED - LOW	rf power adjustable in 5 dB steps
Control - Mini Toggle Switch	Xmit ON - Stand-By - Ext PTT	
RF Connectors	SMA input & N output	
PTT In Connector	RCA	for repeater control
Rear Panel Terminal Strip	GND,+12Vdc, PTT OUT	
Dimensions & Weight	5.5" x 4.5" x 5.0"	2 lbs
Accessories Included	instruction manual, test report, 3 ft DC power core, 20" SMA cable	



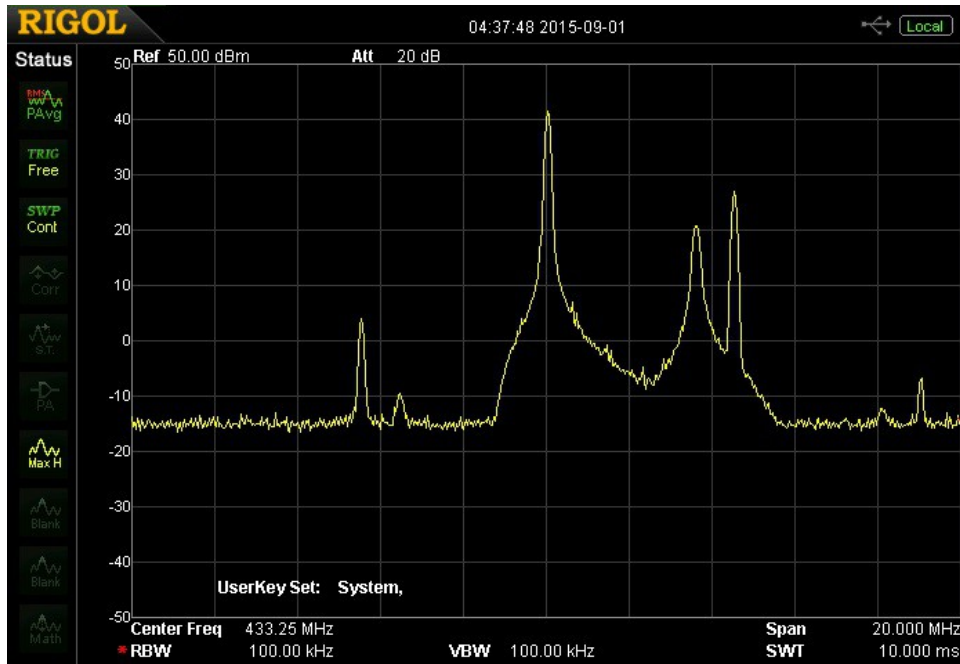

+43 dBm (20Wpep) VUSB-TV Spectrum, 10dB/div & 2 MHz/div

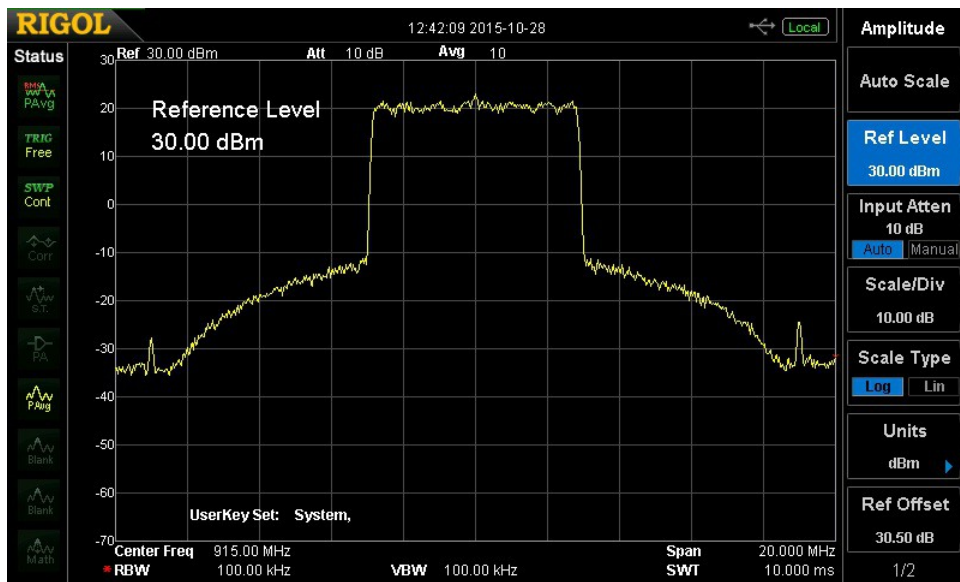

+38dBm (6 Watts rms), DVB-T Spectrum, 10dB/div & 2 MHz/div

NOTICE: *This linear amplifier is not FCC type accepted. Therefore, the use of this amplifier is only legal in the USA, amateur radio, 33 cm band (902 - 928 MHz). Owners and operators of this amplifier must be licensed amateur radio operators.*